
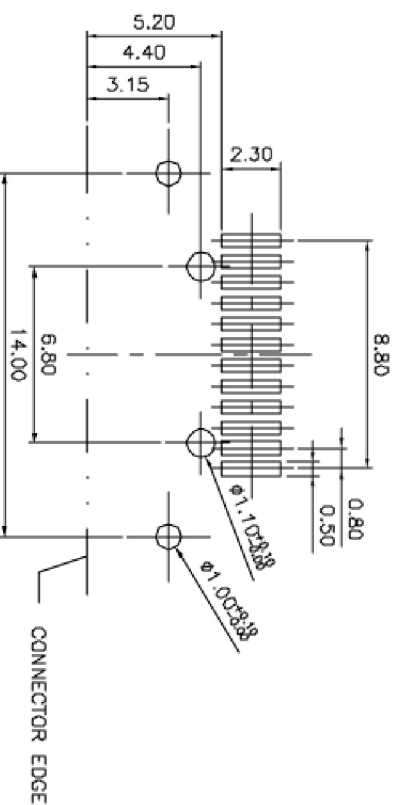
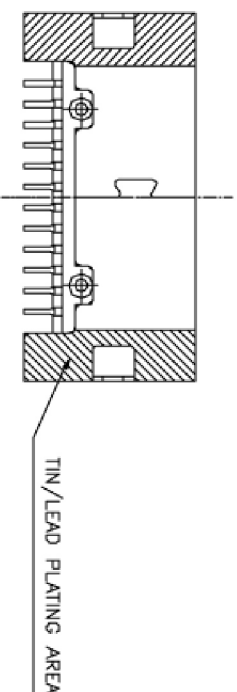
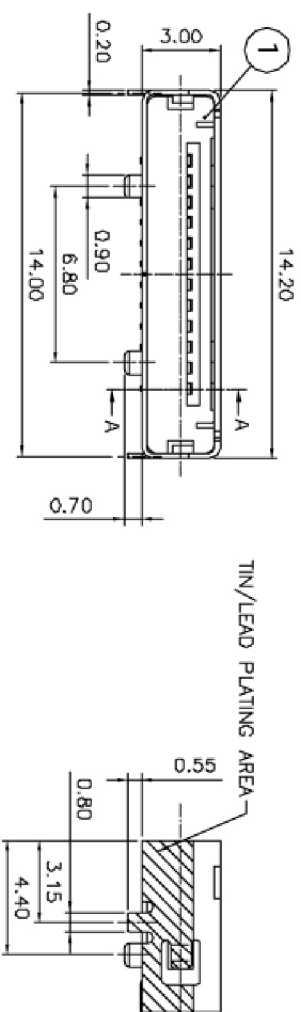


ITEM	PARTS NAME	QTY	MATERIAL	FINISH/REMARK
項目	零件名稱	數量	材質	處理/備註
1	HOUSING	1	IGP	UL-94V-0(Block)
2	SHELL	1	STAINLESS	
3	CONTACT	12	Phosphor Bronze	Gold flash selective

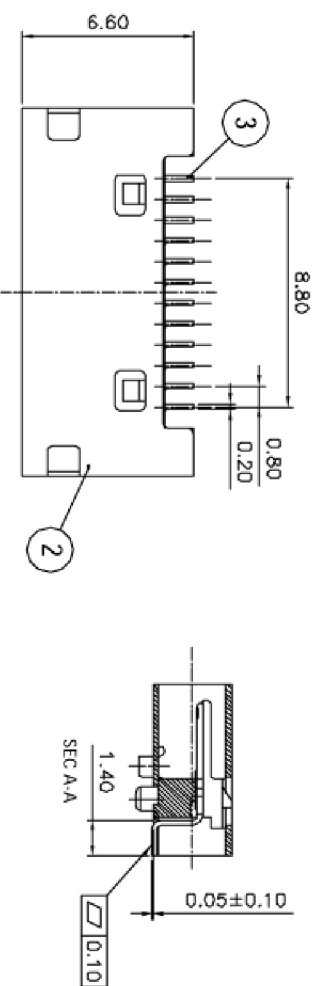

NOTES

- 1.MATERIAL: See drawing
- 2.ELECTRICAL
 - 2.1.Insulator resistance: 1000M ohms Min. @ 250 VDC
 - 2.2.Withstanding voltage: 100 VAC / minute
 - 2.3.Contact resistance: 160m ohms Max.
- 3.MECHANICAL
 - 3.1.Mating force: 30N(3.06kgf) Max.
 - 3.2.Unmating force: 4.2N(0.43kgf) Min.
 - 3.3.Durability: 10000 cycles Min.
 - 3.4.Contact retention force: 4.2N(0.43kgf) Min.
- 4.PART NO.

D23 - 549 - 12 03

SERIES: I/O Connector

MODEL NO. 549

TYPE NO. 03=Type 3

CONTACT 12=12position

UNLESS OTHERWISE SPECIFIED TOLERANCE	CHECKED	DESIGNED	TITLE
尺寸公差	JERRY	JERRY	I/O CONNECTOR for i-PAQ
±0.50	08/08/02"	08/08/02"	SMD type-12 position
.X ±0.30	APPROVED	DRAWN	
.XX ±0.20	JERRY	JERRY	
ANG. ±5°00'	08/08/02"	08/08/02"	

REV. 版本	ECN NO. 工程變更號碼	MARK 記號	REVISIONS 工程內容	SGN 簽名	DATE 日期
1	EXXXX-XXX	△ X 0			