

TC-5204-XXX-XX-X
 A ——— B ——— C


A = Number of Contacts
 02 to 100 contacts

B = Contact Plating
 TP - Tin Plating
 GP - Glod Plating



C = Plastic Base: H x W
 A - 2.54 mm x 3.0 mm
 B - 1.6 mm x 3.0 mm
 C - 1.0 mm x 3.4 mm

SPECIFICATIONS

Current Rating: 1Amps
 Insulator Resistance: 5000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Brass
 Insulator Material: NYLON-6T
 Unit: mm
 Unspecified Tolerance: ±0.20

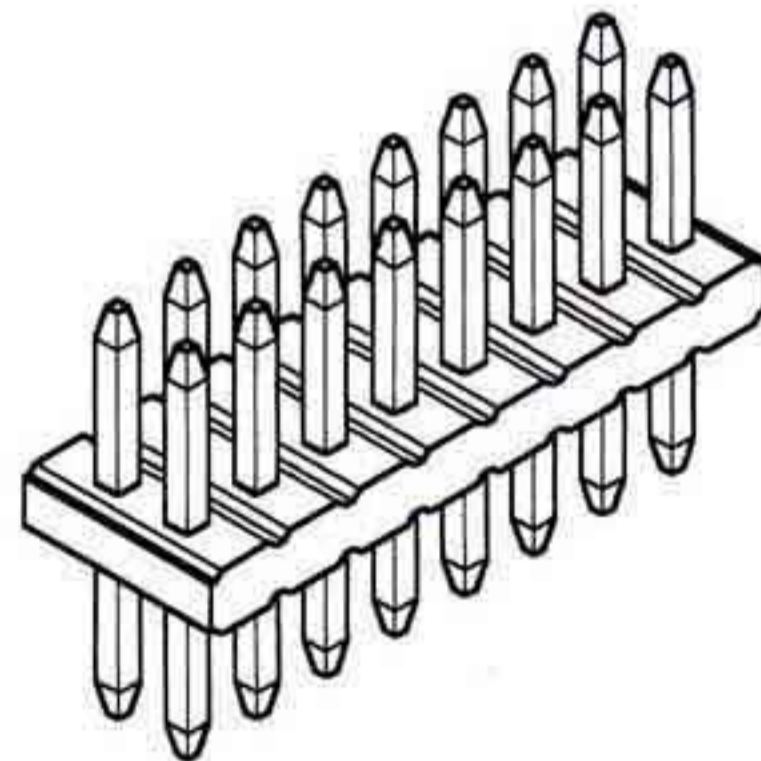

REV	DESCRIPTION	DATE	APP'D
01	FOR APPROVAL	8 Oct 2003	Michael

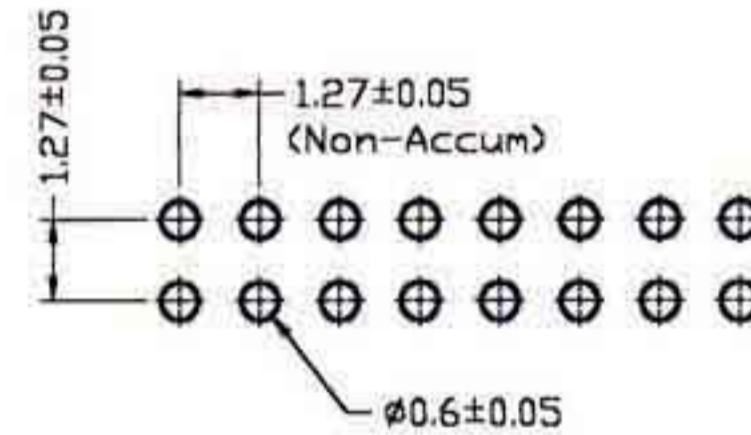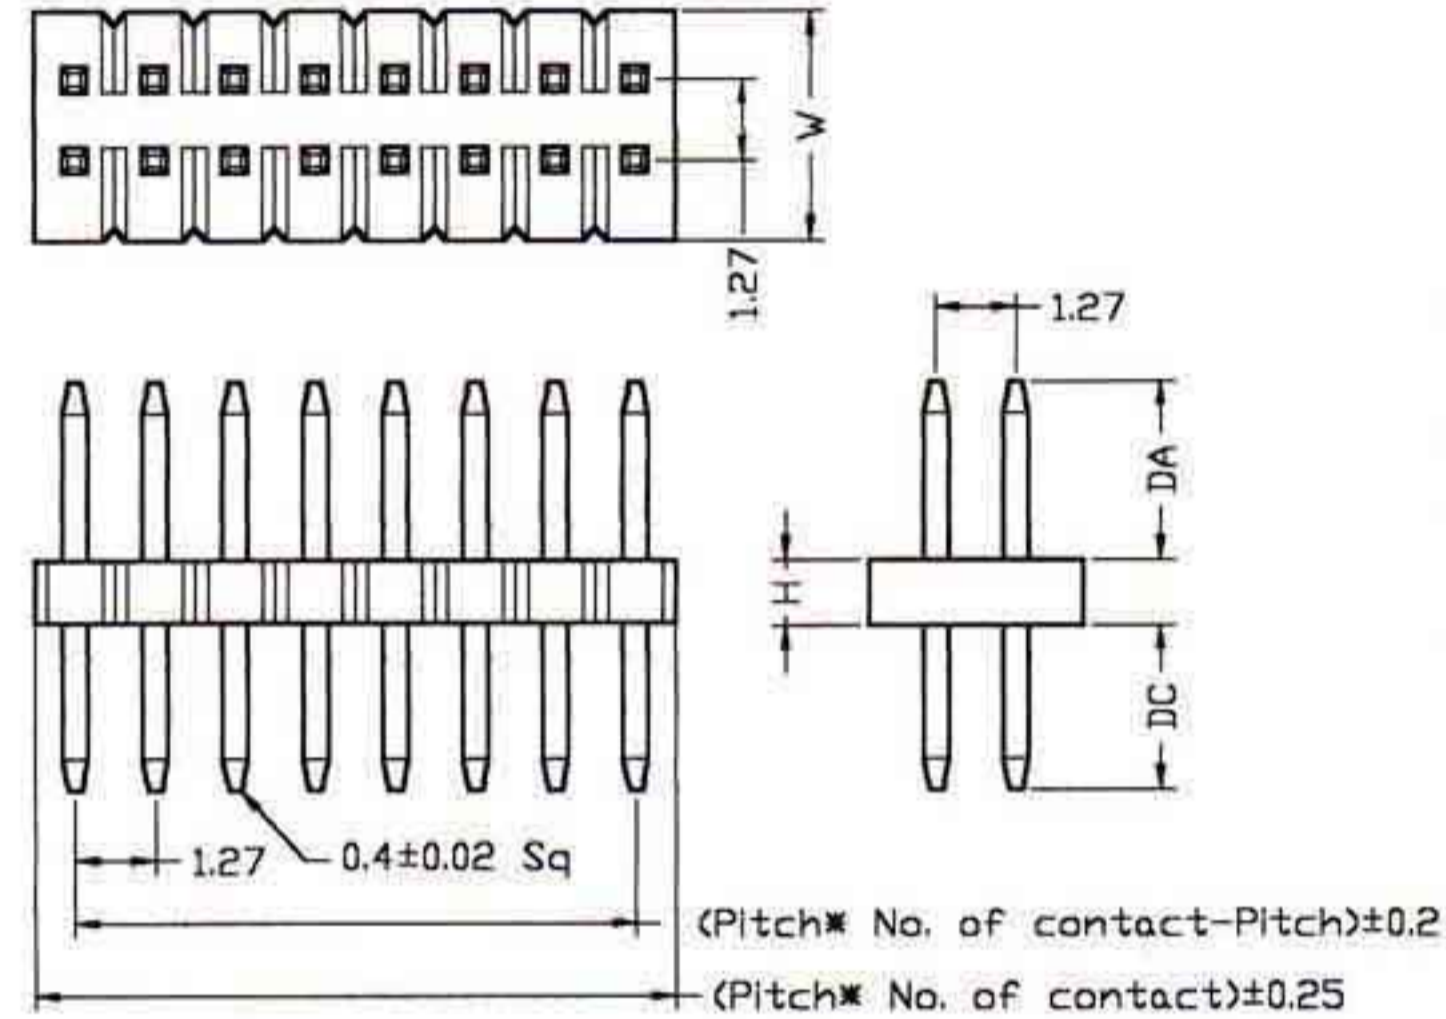

P.C.B. LAYOUT

The length of pin for contact side and PCB side can be optional, based upon customer's demands.

TOLERANCE		INCHES		M/M		TC-TEK 台灣訊科實業有限公司	
.X	.015			.30		TC-TEK Industries Limited TEL:886-2-89914199 FAX:886-2-29929564	
.XX	.010			.10		TITLE: 1.27x1.27mm Pin Header, Straight Dual Row 02 to 100 Contacts	
.XXX	.005			.05		USED ON:	
DRAWN BY	Robert			SCALE		DRAWING NO:	
CHECK BY	Henry			UNIT		TC-5204 Series	
APPD BY	Michael			DATE		REV 01	