

REV	DESCRIPTION	DATE	APP'D
01	FOR APPROVAL	8 Oct 2003	Michael

TC-5207-XXX-XX-X
 A B C





A = Number of Contacts
 02 to 100 contacts

B = Contact Plating
 TP - Tin Plating
 GP - Gold Plating

C = Plastic Base: H x W
 A - 2.5 mm x 3.0 mm
 B - 1.6 mm x 3.0 mm
 C - 1.0 mm x 3.4 mm

SPECIFICATIONS

Current Rating: 1Amps
 Insulator Resistance: 5000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°-+105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Brass
 Insulator Material: NYLON-6T
 Unit: mm
 Unspecified Tolerance: ±0.20

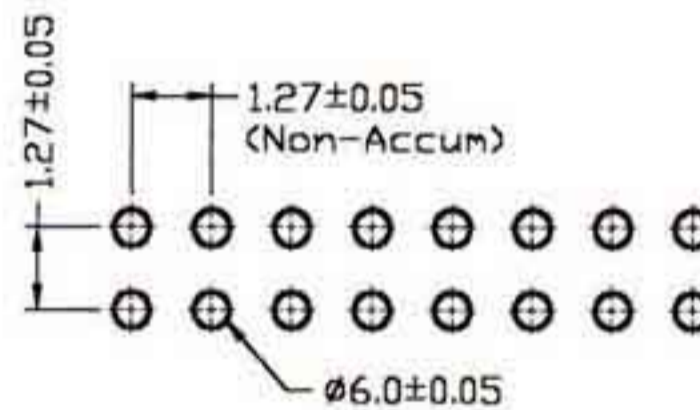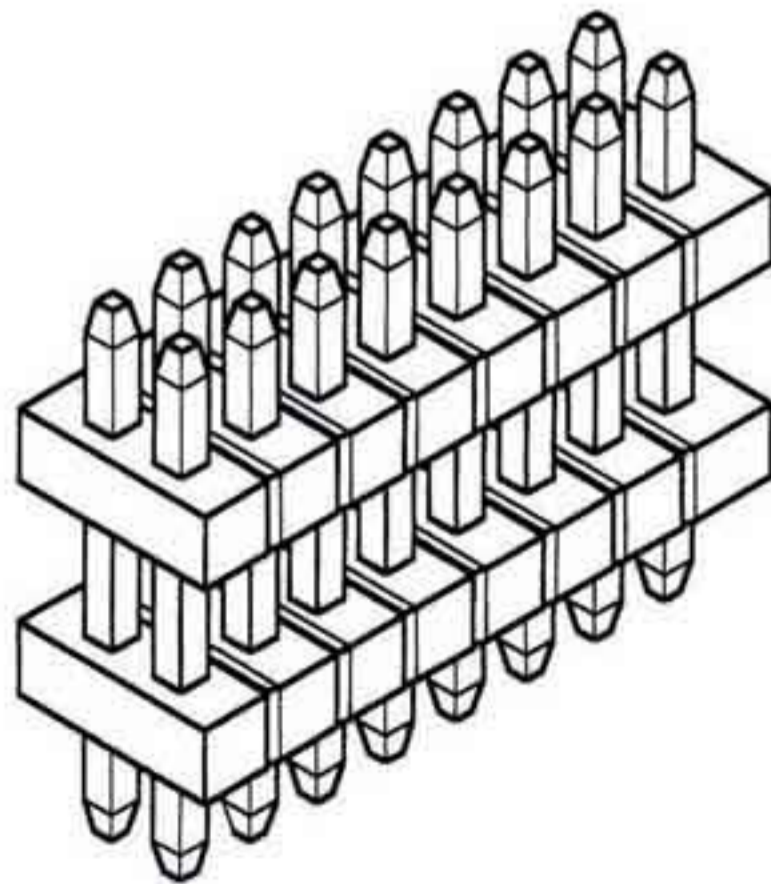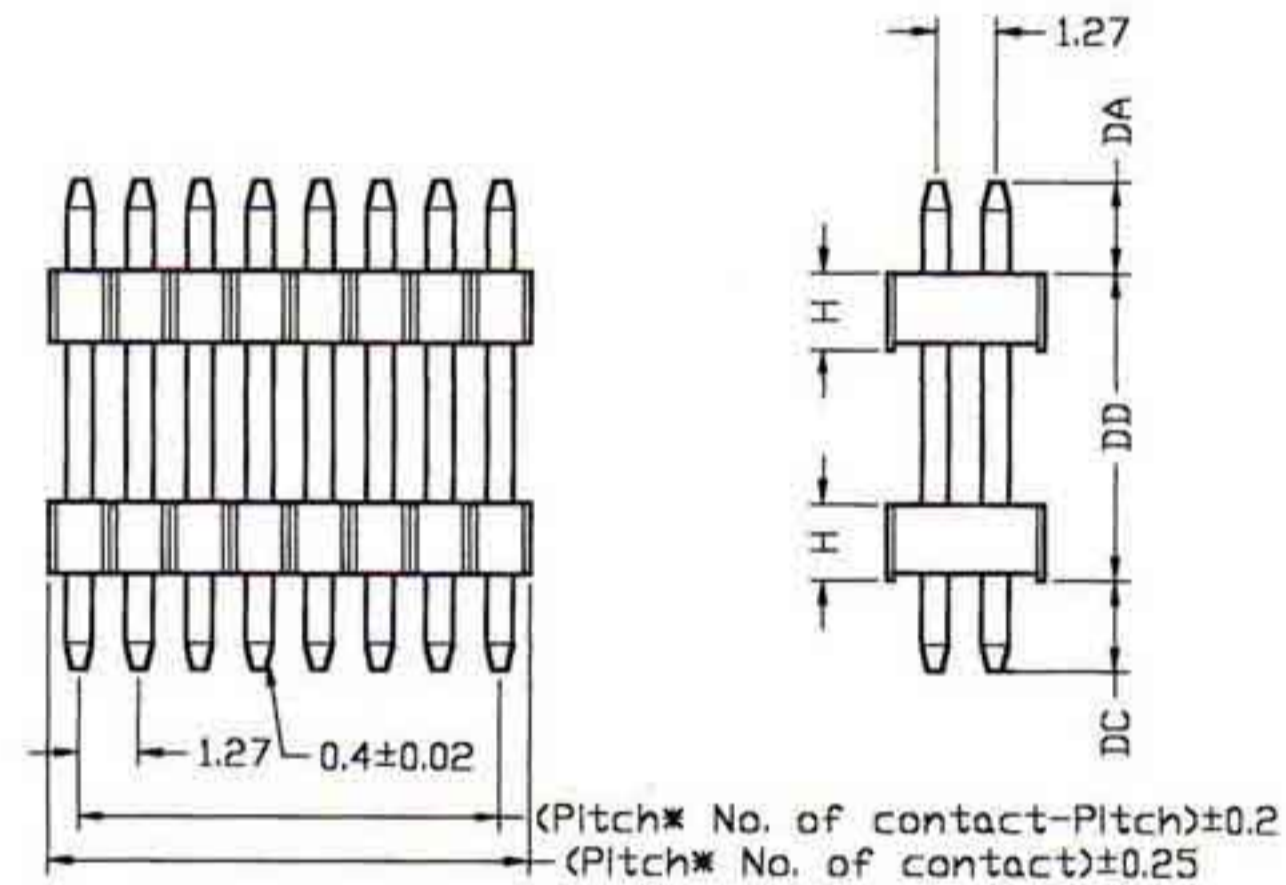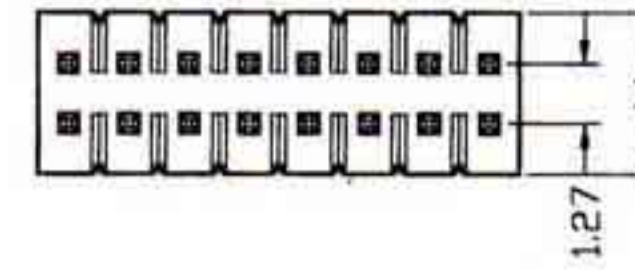

P.C.B. LAYOUT

The length of pin for contact side and PCB side can be optional, based upon customer's demands.

TOLERANCE		INCHES	M/M	TC-TEK 台灣訊科實業有限公司 TC-TEK Industries Limited TEL:886-2-89914199 FAX:886-2-29929564
.X	.XX	.015	.30	
.XX	.XXX	.010	.10	
.XXX		.005	.05	
DRAWN BY	Robert		USED ON:	
CHECK BY	Henry		SCALE	DRAWING NO:
APPD BY	Michael		UNIT	TC-5207 Series
			DATE	