

TC-5508-XXX-XX








A = Number of Contacts
02 to 80 contacts

B = Contact Plating
TP - Tin Plating
GP - Gold Plating

SPECIFICATIONS

Current Rating:	1Amps
Insulator Resistance:	5000 Megohms min.
Dielectric Withstanding:	AC 500V
Operating Temperature:	-40°~+105°C
Max Processing Temp:	230° for 30~60 seconds (260° for 10 seconds)
Contact Material:	Brass
Insulator Material:	PBT or NYLON-6T
* Standard:	PBT
Unit:	mm
Unspecified Tolerance:	±0.20

REV	DESCRIPTION	DATE	APP'D
01	FOR APPROVAL	8 Oct 2003	Michael

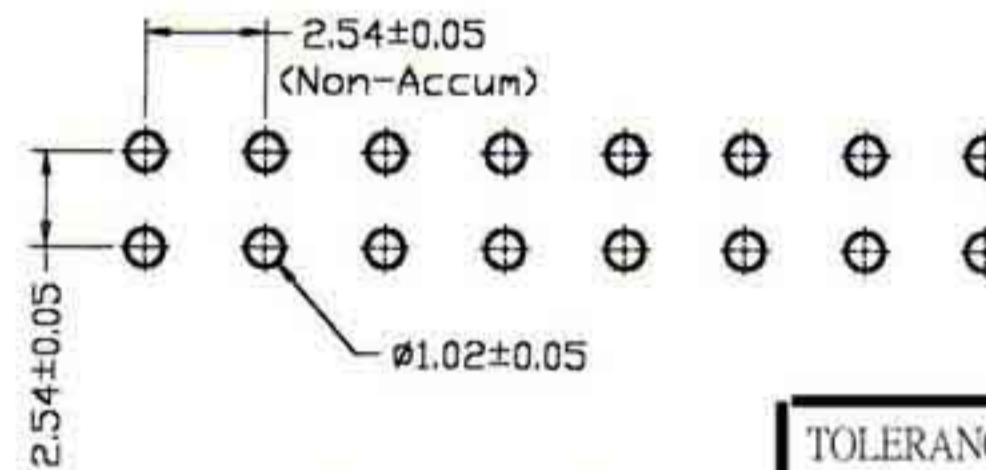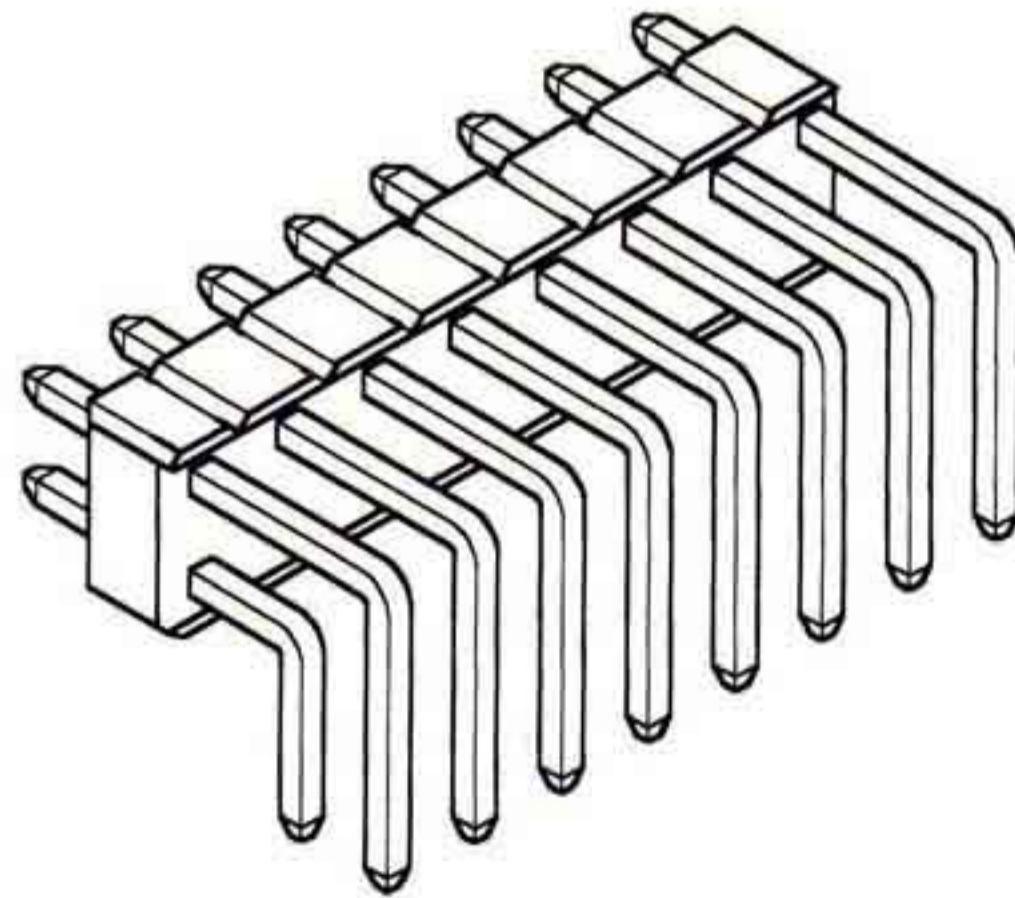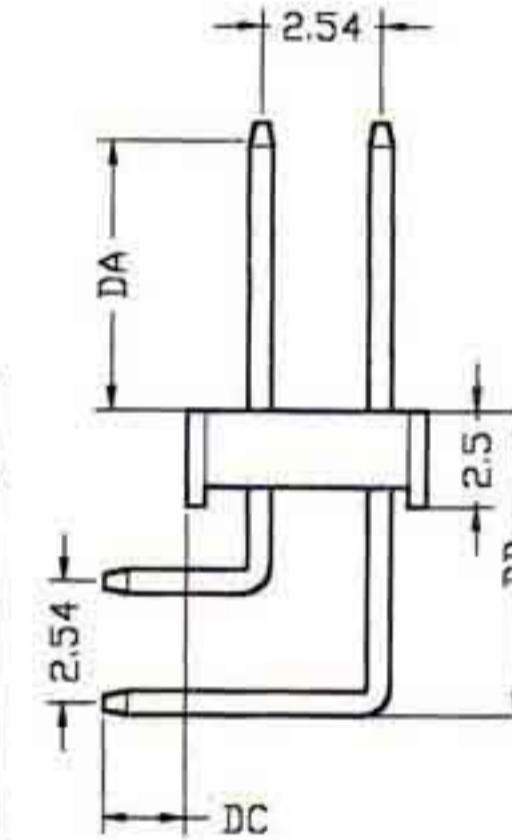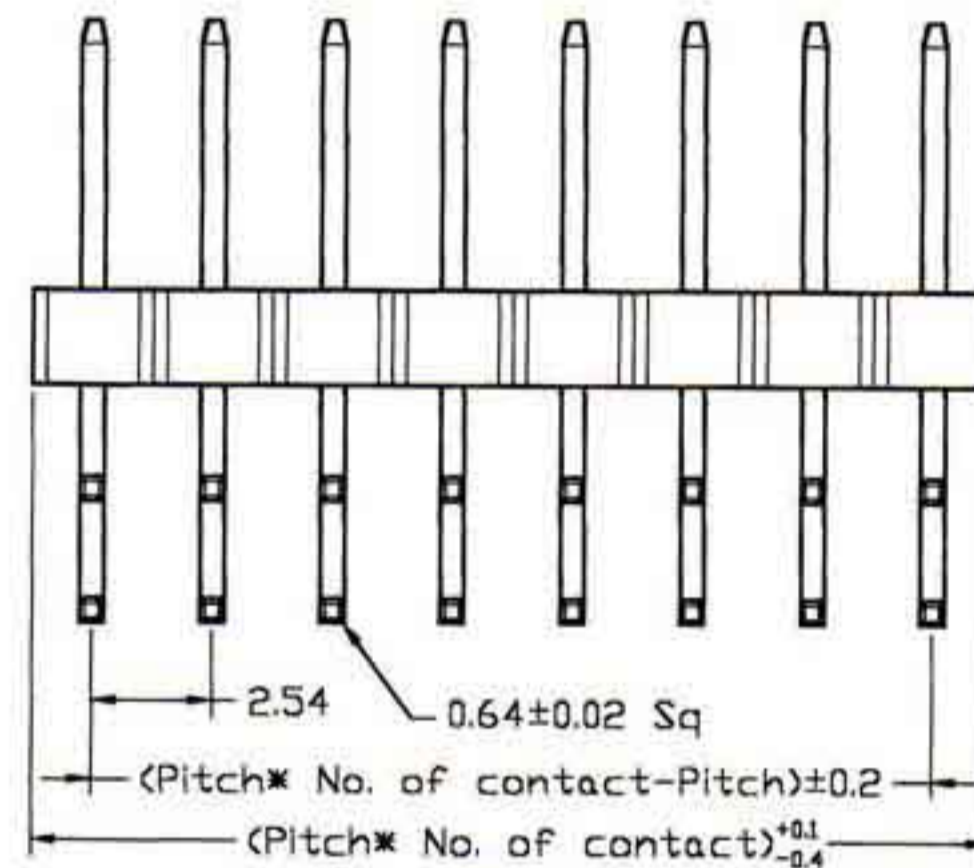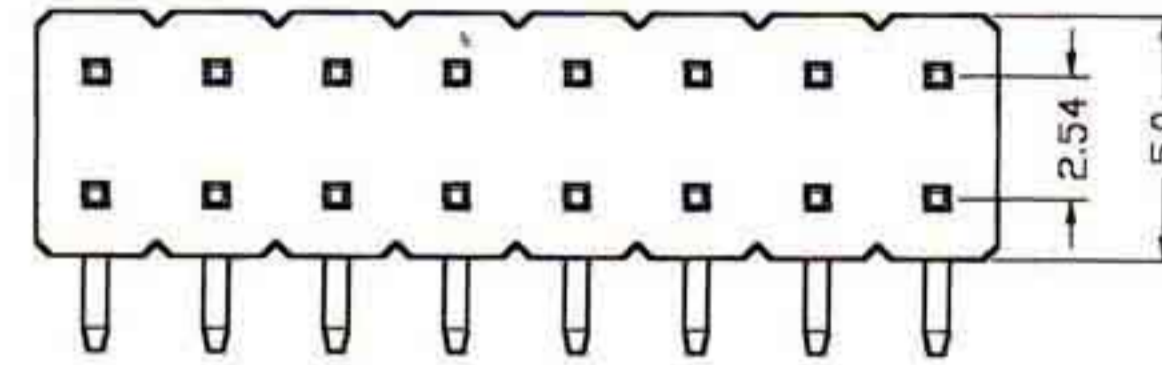

P.C.B. LAYOUT

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

TC-TEK 台灣訊科實業有限公司
TC-TEK Industries Limited
 TEL:886-2-89914199 FAX:886-2-29929564

TITLE: 2.54x2.54mm Pin Header, Right Angle Dual Row 02 to 80 Contacts

DRAWN BY	Robert	USED ON:	
CHECK BY	Henry	SCALE	DRAWING NO:
APPD BY	Michael	UNIT	TC-5508 Seiers
		DATE	REV 01

The length of pin for contact side and PCB side can be optional, based upon customer's demands.