





REV	DESCRIPTION	DATE	APP'D
01	FOR APPROVAL	8 Oct 2003	Michael

TC-6203-XXX-XX  
 A                      B

A = Number of Contacts  
 06 to 100 contacts  
 B = Contact Plating  
 GP - Gold Plating

**SPECIFICATIONS**

Current Rating: 1Amps  
 Insulator Resistance: 5000 Megohms min.  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40°~+105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)  
 Contact Material: Phospher Bronze  
 Insulator Material: NYLON-6T  
 Plating: Selective Plating or Gold Flash  
 Unit: mm  
 Unspecified Tolerance: ±0.20

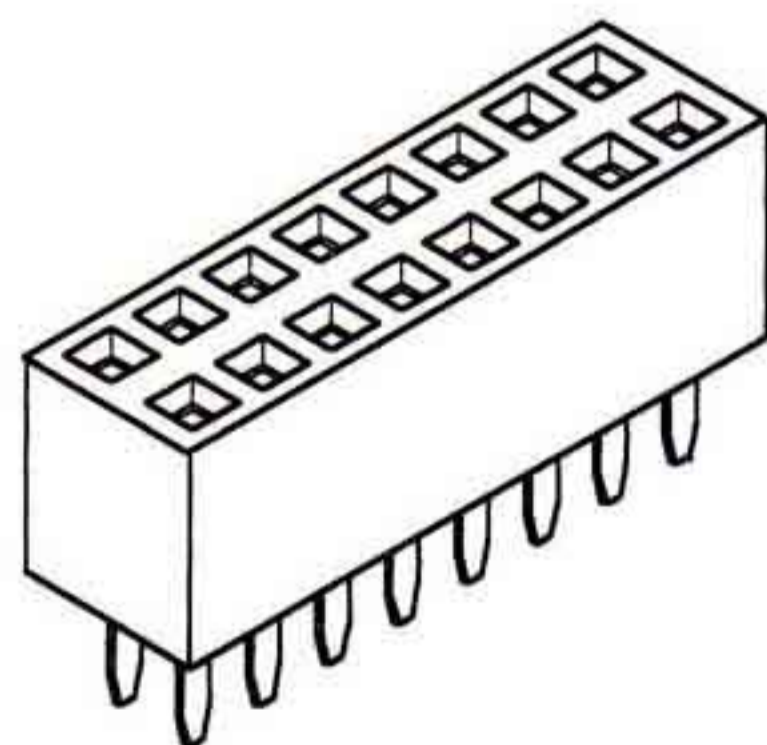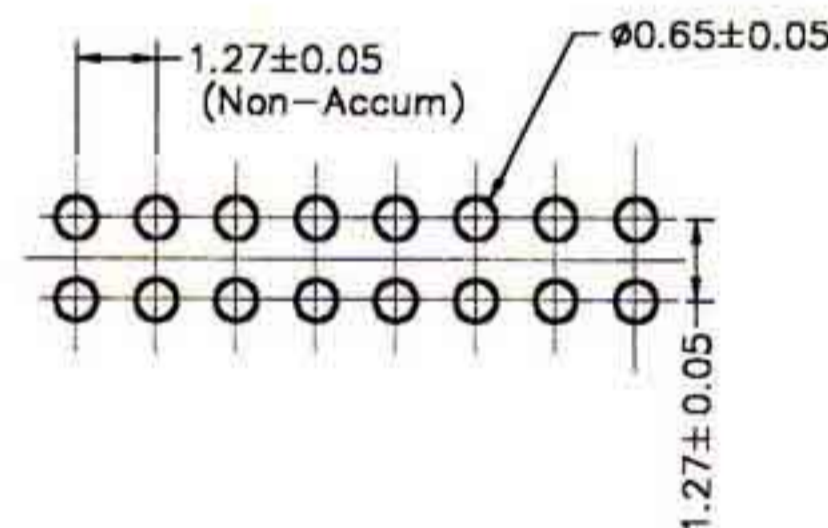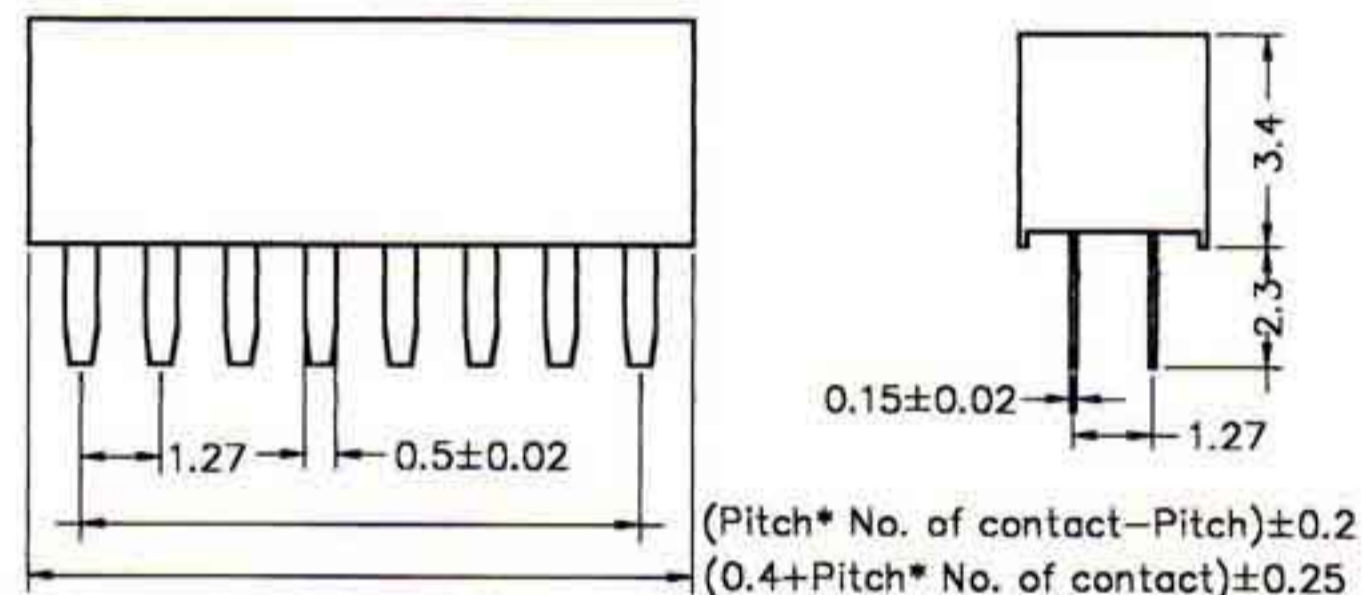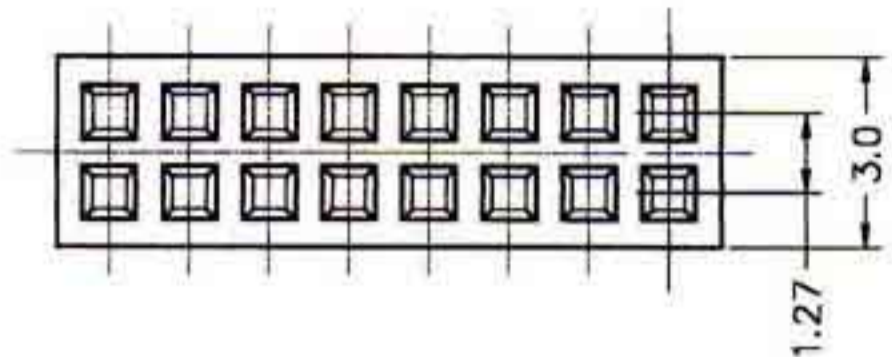

P.C.B. LAYOUT

TOLERANCE		INCHES	M/M	<b>TC-TEK</b> 台灣訊科實業有限公司 <b>TC-TEK Industries Limited</b> TEL:886-2-89914199 FAX:886-2-29929564
.X		.015	.30	
.XX		.010	.10	
.XXX		.005	.05	TITLE: 1.27x1.27mm Female Header, Straight Dual Row 06 to 100 Contacts
DRAWN BY	<b>Robert</b>			USED ON:
CHECK BY	<b>Henry</b>			SCALE: _____
APPD BY	<b>Michael</b>			DRAWING NO: _____
		UNIT: _____		<b>TC-6203 Series</b>
		DATE: _____		