





REV	DESCRIPTION	DATE	APP'D
01	FOR APPROVAL	8 Oct 2003	Michael

TC-6204-XXX-XX-X
 A B C

- A = Number of Contacts
06 to 100 contacts
- B = Contact Plating
GP - Glod Plating
- C = Locating peg
W - With locating peg
O - Without locating peg

SPECIFICATIONS

Current Rating:	1Amps
Insulator Resistance:	5000 Megohms min.
Dielectric Withstanding:	AC 500V
Operating Temperature:	-40°~+105°C
Max Processing Temp:	230° for 30~60 seconds (260° for 10 seconds)
Contact Material:	Phosper Bronze
Insulator Material:	NYLON-6T
Plating:	Selective Plating or Gold Flash
Unit:	mm
Unspecified Tolerance:	±0.20

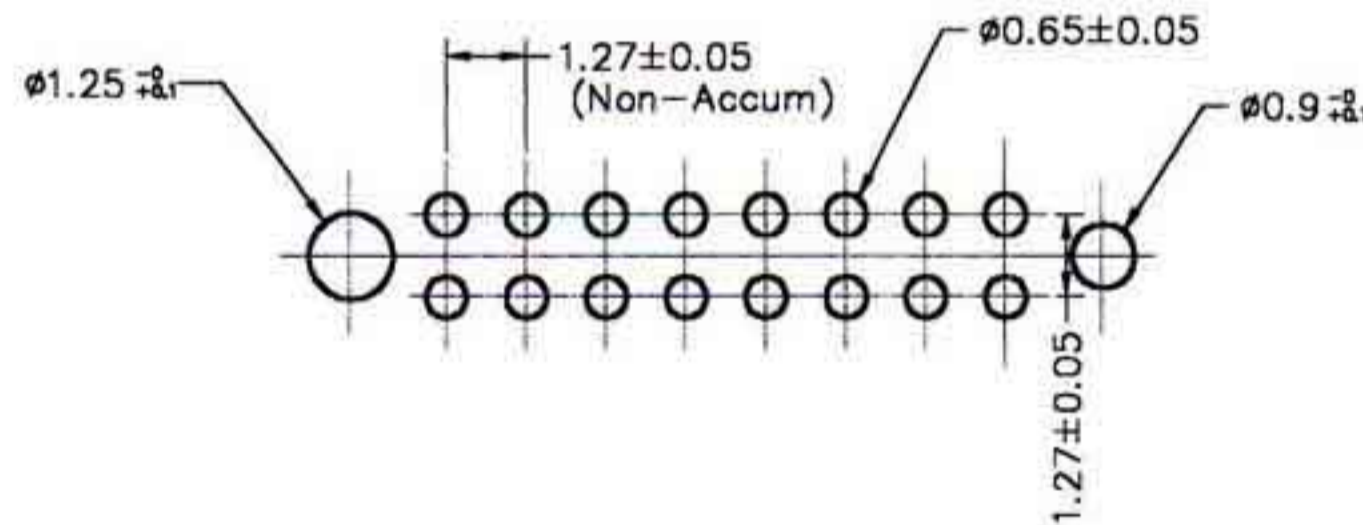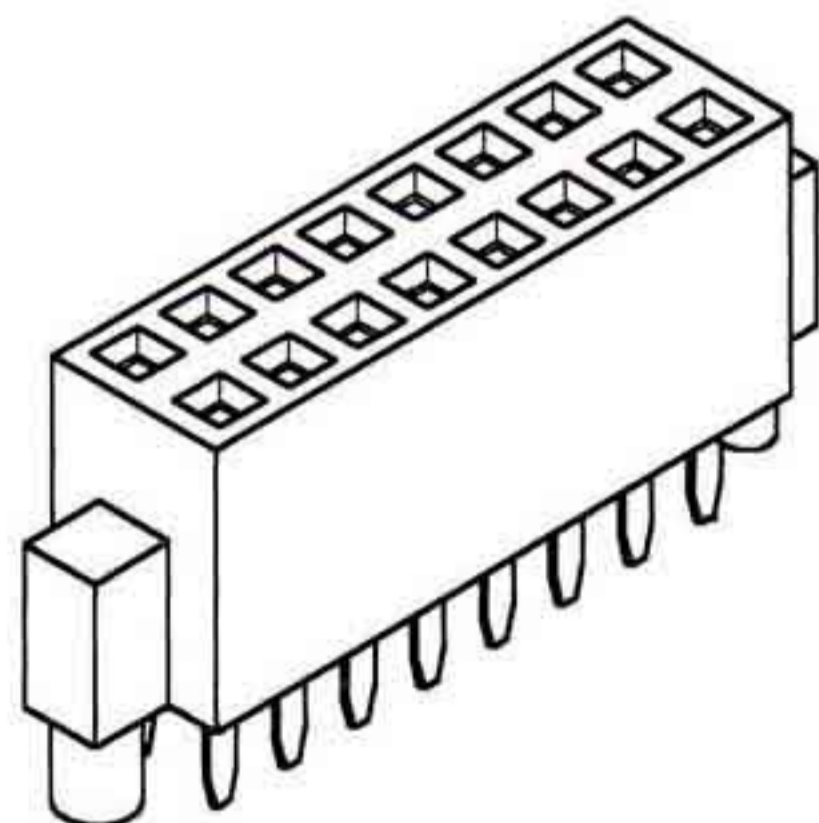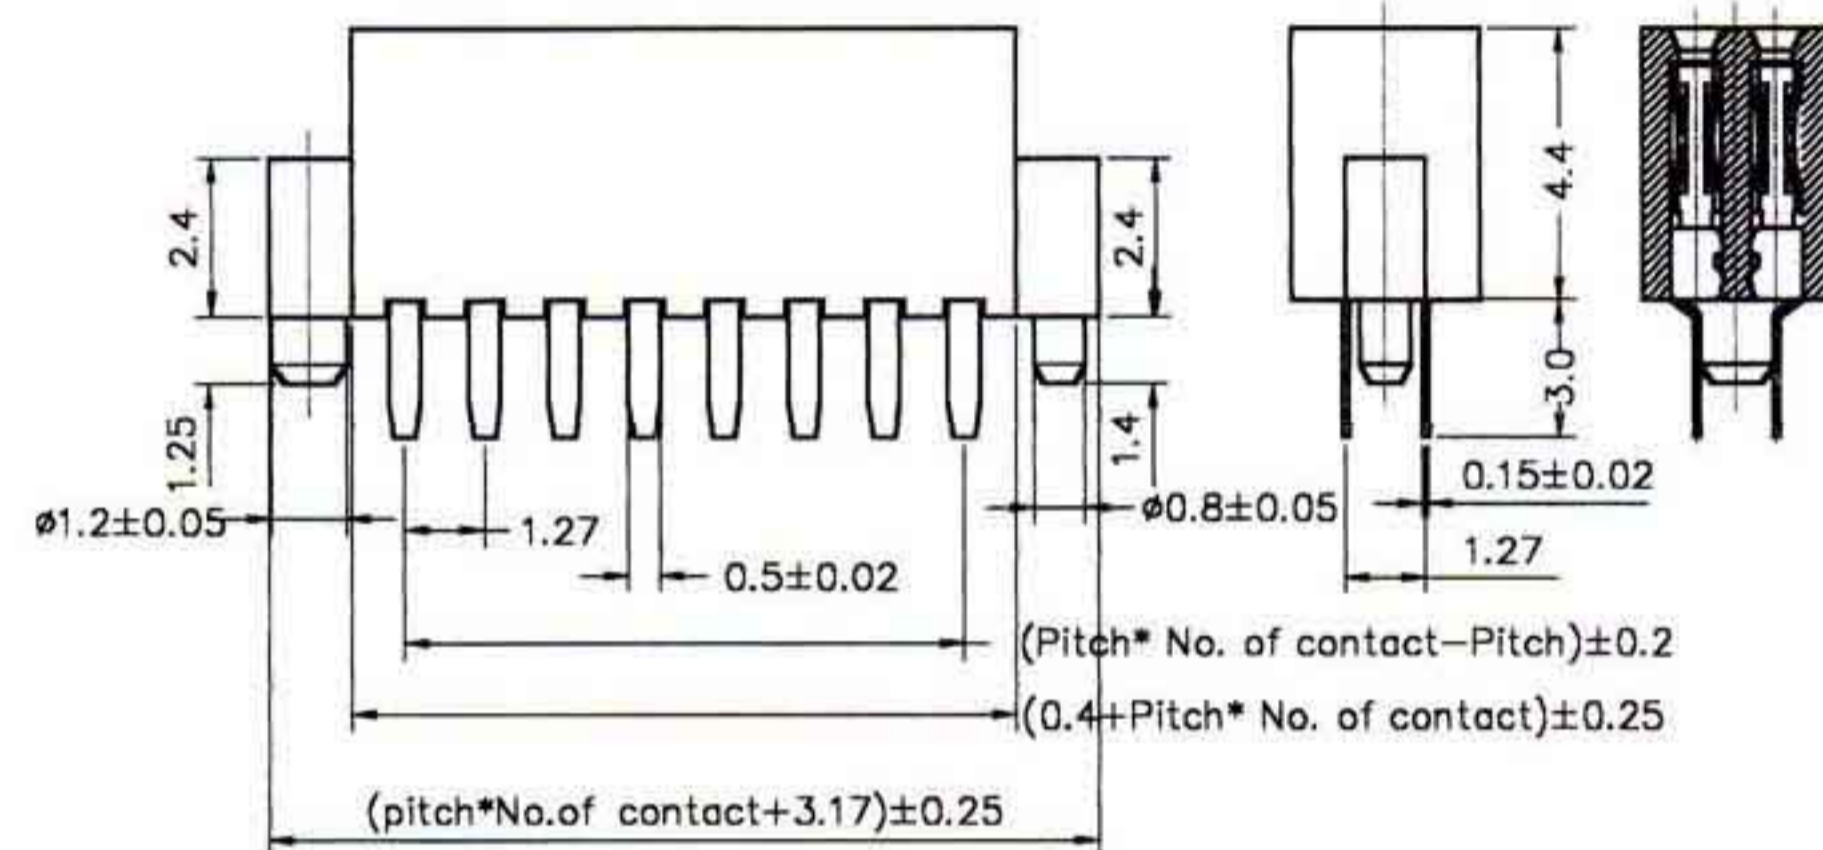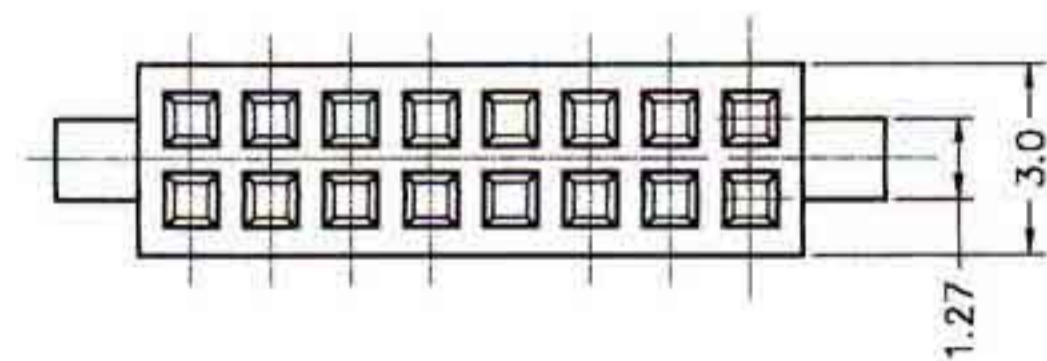

P.C.B. LAYOUT

TOLERANCE		INCHES	M/M	TC-TEK 台灣訊科實業有限公司 TC-TEK Industries Limited TEL:886-2-89914199 FAX:886-2-29929564
.X		.015	.30	
.XX		.010	.10	
.XXX		.005	.05	
DRAWN BY	Robert		USED ON:	
CHECK BY	Henry		SCALE	DRAWING NO:
APPD BY	Michael		UNIT	TC-6204 Series
			DATE	

TITLE: 1.27x1.27mm Female Header
Dual Row 06 to 100 Contacts