
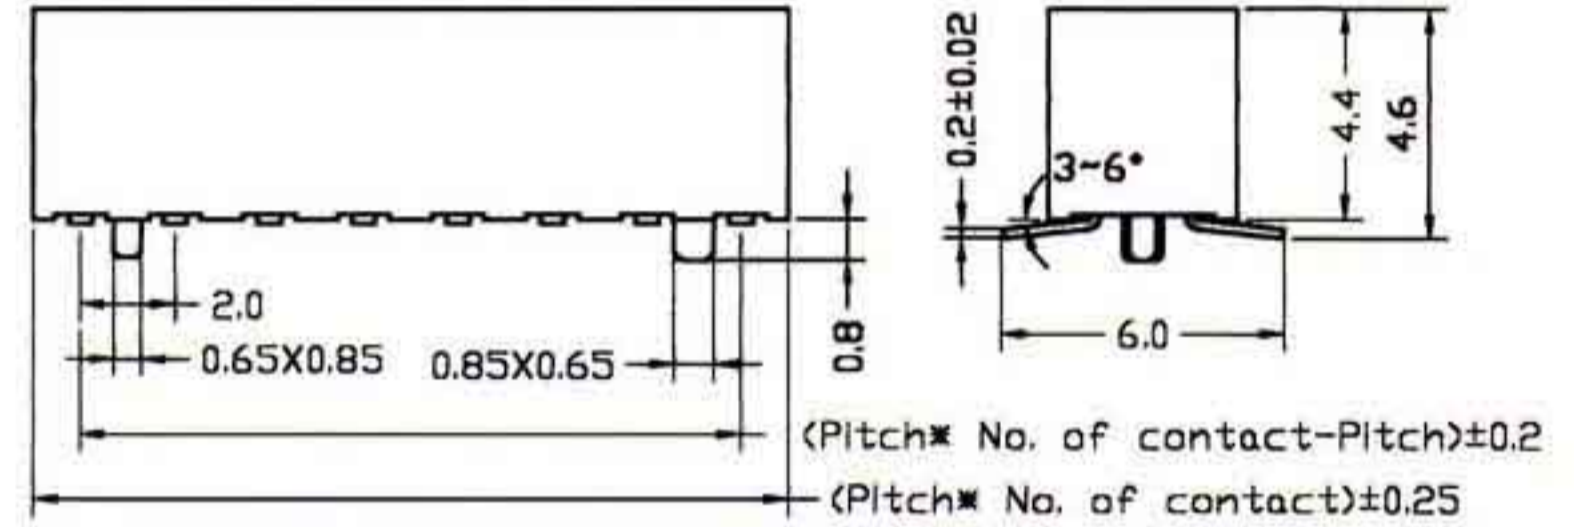


TC-6303-XXX-XX-X
 A B C

REV	DESCRIPTION	DATE	APP'D
01	FOR APPROVAL	8 Oct 2003	Michael

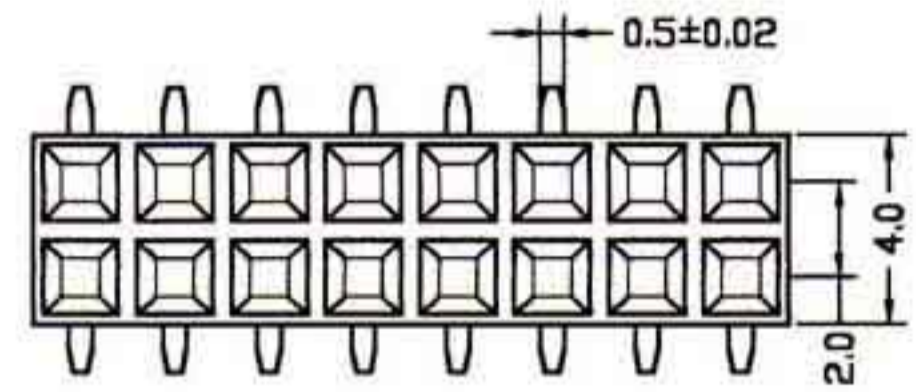

A = Number of Contacts
 08 to 80 contacts

B = Contact Plating
 GP - Glod Plating



C = Locating Peg
 W: With locating peg
 O: Without locating peg

SPECIFICATIONS

Current Rating: 1Amps
 Insulator Resistance: 5000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°-+105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)

Contact Material: Phospher Bronze
 Insulator Material: NYLON-6T
 Plating: Selective Plating
 or Gold Flash

Unit: mm
 Unspecified Tolerance: ±0.20

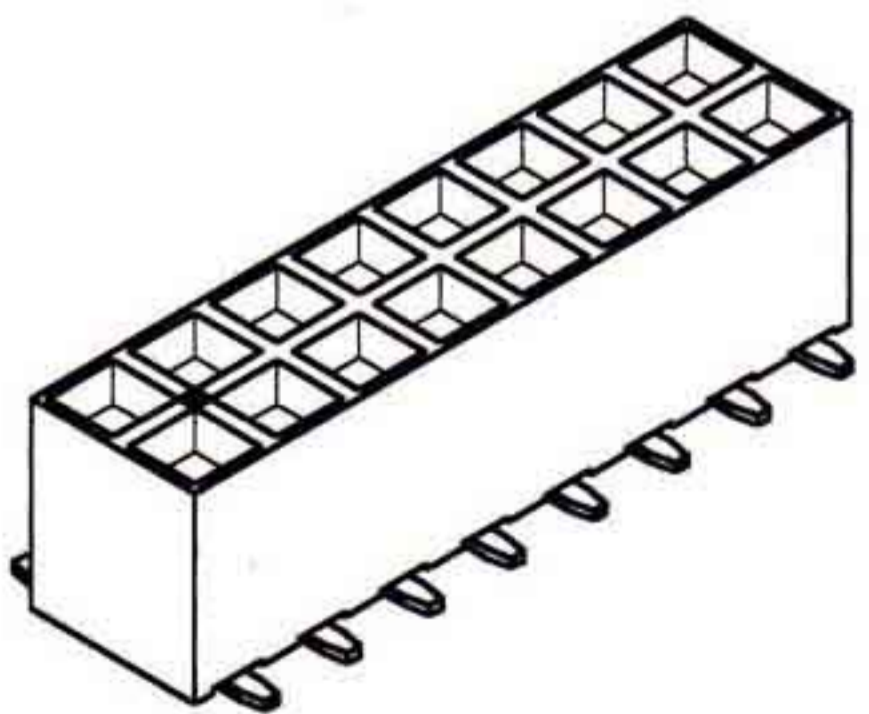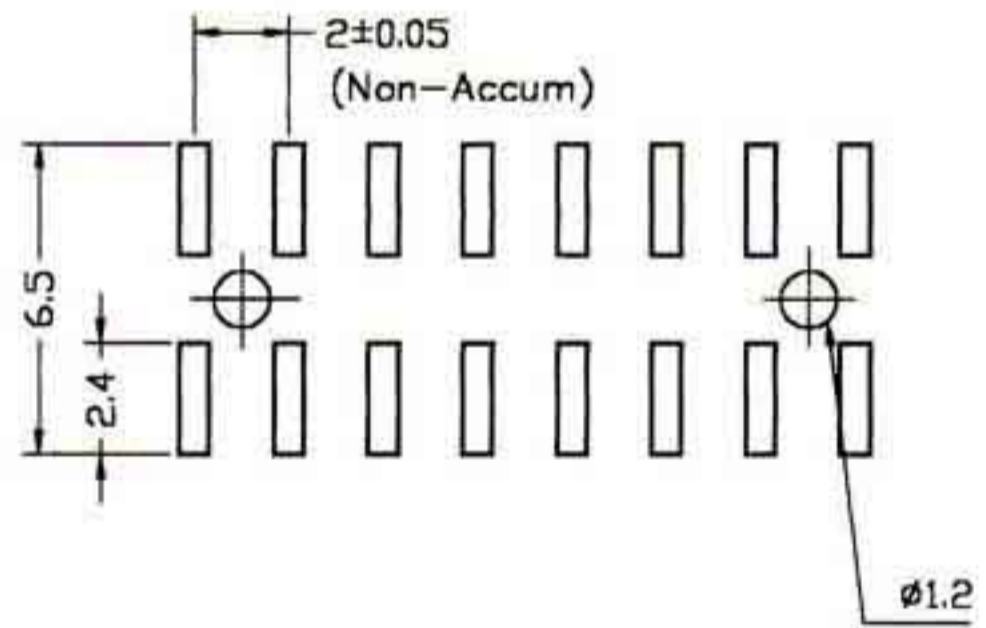

P.C.B. LAYOUT

TOLERANCE		INCHES	M/M	TC-TEK 台灣訊科實業有限公司 TC-TEK Industries Limited TEL:886-2-89914199 FAX:886-2-29929564
.X		.015	.30	
.XX		.010	.10	
.XXX		.005	.05	TITLE: 2.0x2.0mm Female Header SMT, Dual Row 08 to 80 Contacts
DRAWN BY	Robert			USED ON:
CHECK BY	Henry			SCALE: _____
APPD BY	Michael			DRAWING NO: _____
		UNIT: _____		TC-6303 Series
		DATE: _____		