


SERIES

# BL112

零插入力 立式反腳位 表面黏著型  
ZIF Straight-X SMT

## PCB Layout

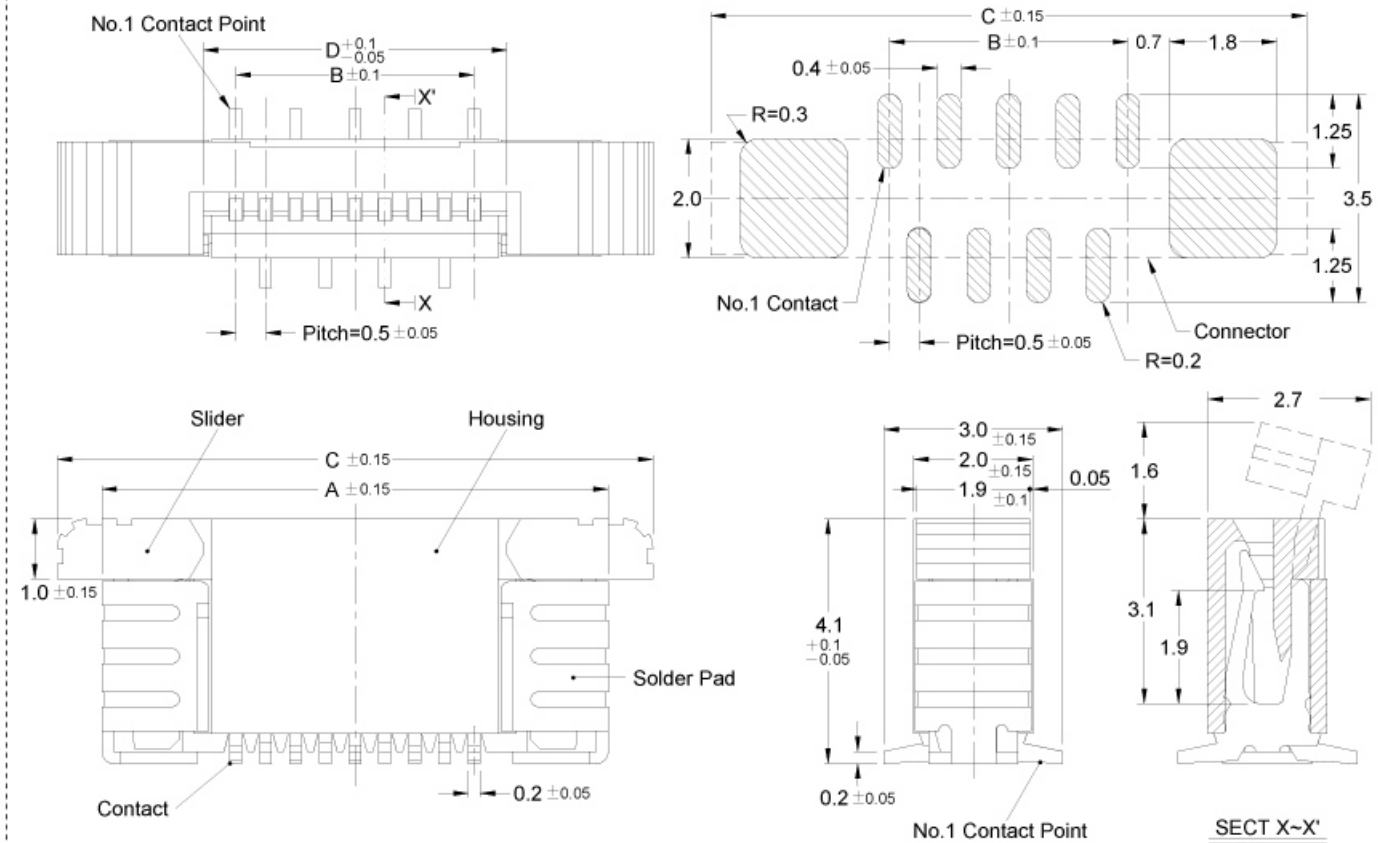

No. of Contacts	Part No.	DIM. A	DIM. B	DIM. C	DIM. D
4	BL112-04SX-xxxx	6.0	1.5	7.5	2.6
5	BL112-05SX-xxxx	6.5	2.0	8.0	3.1
6	BL112-06SX-xxxx	7.0	2.5	8.5	3.6
7	BL112-07SX-xxxx	7.5	3.0	9.0	4.1
8	BL112-08SX-xxxx	8.0	3.5	9.5	4.6
9	BL112-09SX-xxxx	8.5	4.0	10.0	5.1
10	BL112-10SX-xxxx	9.0	4.5	10.5	5.6
11	BL112-11SX-xxxx	9.5	5.0	11.0	6.1
12	BL112-12SX-xxxx	10.0	5.5	11.5	6.6
13	BL112-13SX-xxxx	10.5	6.0	12.0	7.1
14	BL112-14SX-xxxx	11.0	6.5	12.5	7.6
15	BL112-15SX-xxxx	11.5	7.0	13.0	8.1
16	BL112-16SX-xxxx	12.0	7.5	13.5	8.6
17	BL112-17SX-xxxx	12.5	8.0	14.0	9.1
18	BL112-18SX-xxxx	13.0	8.5	14.5	9.6
19	BL112-19SX-xxxx	13.5	9.0	15.0	10.1
20	BL112-20SX-xxxx	14.0	9.5	15.5	10.6
21	BL112-21SX-xxxx	14.5	10.0	16.0	11.1
22	BL112-22SX-xxxx	15.0	10.5	16.5	11.6
23	BL112-23SX-xxxx	15.5	11.0	17.0	12.1
24	BL112-24SX-xxxx	16.0	11.5	17.5	12.6
25	BL112-25SX-xxxx	16.5	12.0	18.0	13.1
26	BL112-26SX-xxxx	17.0	12.5	18.5	13.6
27	BL112-27SX-xxxx	17.5	13.0	19.0	14.1

No. of Contacts	Part No.	DIM. A	DIM. B	DIM. C	DIM. D
28	BL112-28SX-xxxx	18.0	13.5	19.5	14.6
29	BL112-29SX-xxxx	18.5	14.0	20.0	15.1
30	BL112-30SX-xxxx	19.0	14.5	20.5	15.6
31	BL112-31SX-xxxx	19.5	15.0	21.0	16.1
32	BL112-32SX-xxxx	20.0	15.5	21.5	16.6
33	BL112-33SX-xxxx	20.5	16.0	22.0	17.1
34	BL112-34SX-xxxx	21.0	16.5	22.5	17.6
35	BL112-35SX-xxxx	21.5	17.0	23.0	18.1
36	BL112-36SX-xxxx	22.0	17.5	23.5	18.6
37	BL112-37SX-xxxx	22.5	18.0	24.0	19.1
38	BL112-38SX-xxxx	23.0	18.5	24.5	19.6
39	BL112-39SX-xxxx	23.5	19.0	25.0	20.1
40	BL112-40SX-xxxx	24.0	19.5	25.5	20.6
41	BL112-41SX-xxxx	24.5	20.0	26.0	21.1
42	BL112-42SX-xxxx	25.0	20.5	26.5	21.6
43	BL112-43SX-xxxx	25.5	21.0	27.0	22.1
44	BL112-44SX-xxxx	26.0	21.5	27.5	22.6
45	BL112-45SX-xxxx	26.5	22.0	28.0	23.1
46	BL112-46SX-xxxx	27.0	22.5	28.5	23.6
47	BL112-47SX-xxxx	27.5	23.0	29.0	24.1
48	BL112-48SX-xxxx	28.0	23.5	29.5	24.6
49	BL112-49SX-xxxx	28.5	24.0	30.0	25.1
50	BL112-50SX-xxxx	29.0	24.5	30.5	25.6
---	---	---	---	---	---